LG Intellowasher

WD-3243RHD/WD-3245RHD

COMBINATION WASHER AND VENTLESS CONDENSING DRYER

ELECTRICAL CONNECTION: Standard 110-volt, 3 prong plug, separate 20-amp circuit required in most localities.

VOLTAGE: 115-volt, 60 HZ standard @13 amps peak draw.

WATER CONNECTION: Standard 3/4” hose thread connections with standard 1/2” water supply. Water pressure should be between 4.5 and 145 PSI. Over 145 PSI requires that a pressure reducing device be installed.

DRAIN REQUIREMENTS: Drain hose should be installed from 23” to 40” from bottom of machine. Drain hose may be installed into a 3/4” Y branch tailpiece or a 1 1/2” standpipe depending on local codes.

WASTEWATER: 5 gallons per minute discharge rate with a maximum 6 gallons per discharge.

CLEARANCE REQUIREMENTS: 0” from top and sides. 1” from back of machine.

LEVELING: Machine is fitted with four leveling legs and should be installed on a well supported floor. Allowable slope under entire machine is 1”.

DIMENSIONS: 23 1/2” wide **X** 24” deep **X** 33 1/2” tall

WEIGHT: 156 1/2 lbs.

SHIPPING BOLTS MUST BE REMOVED PRIOR TO OPERATION

DRAIN HOSE LENGTH - 59”
outer diameter—1 1/8”
inner diameter—13/16”

WATER INLET HOSE LENGTH - 82”

POWER CORD LENGTH - 89 1/2”
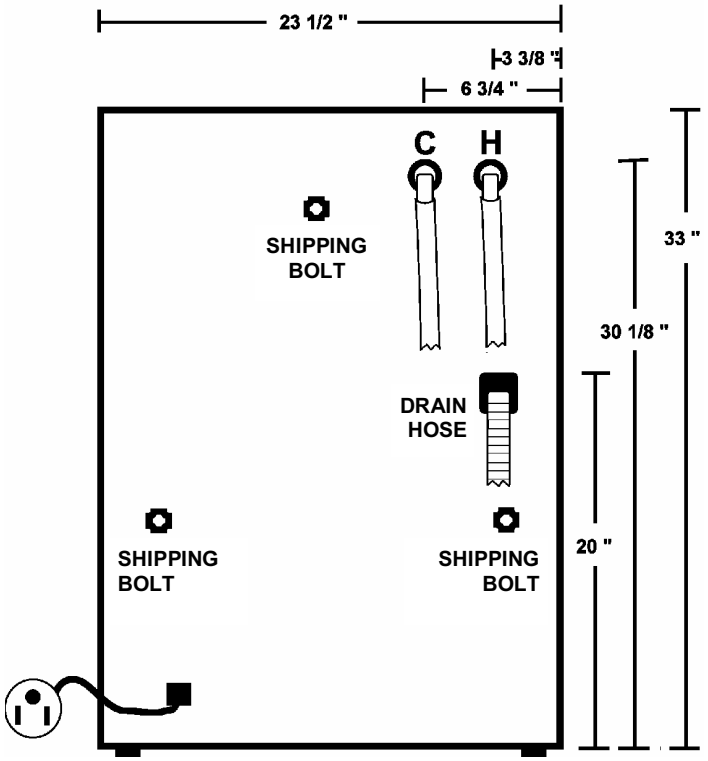
For more information or help please refer to the machines owner’s manual, visit **www.oasisappliance.**com, or call us at **888-876-8002**